

1

2

3

4

5

6

7

8



CHANGE

Revision

Date

Description

Approval

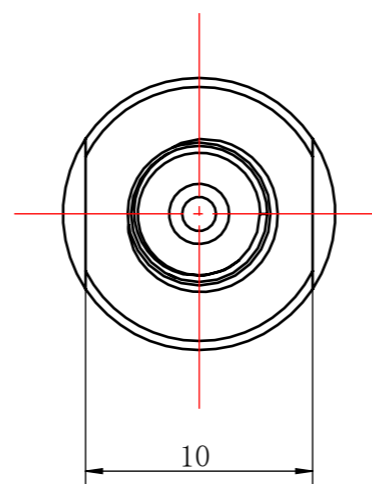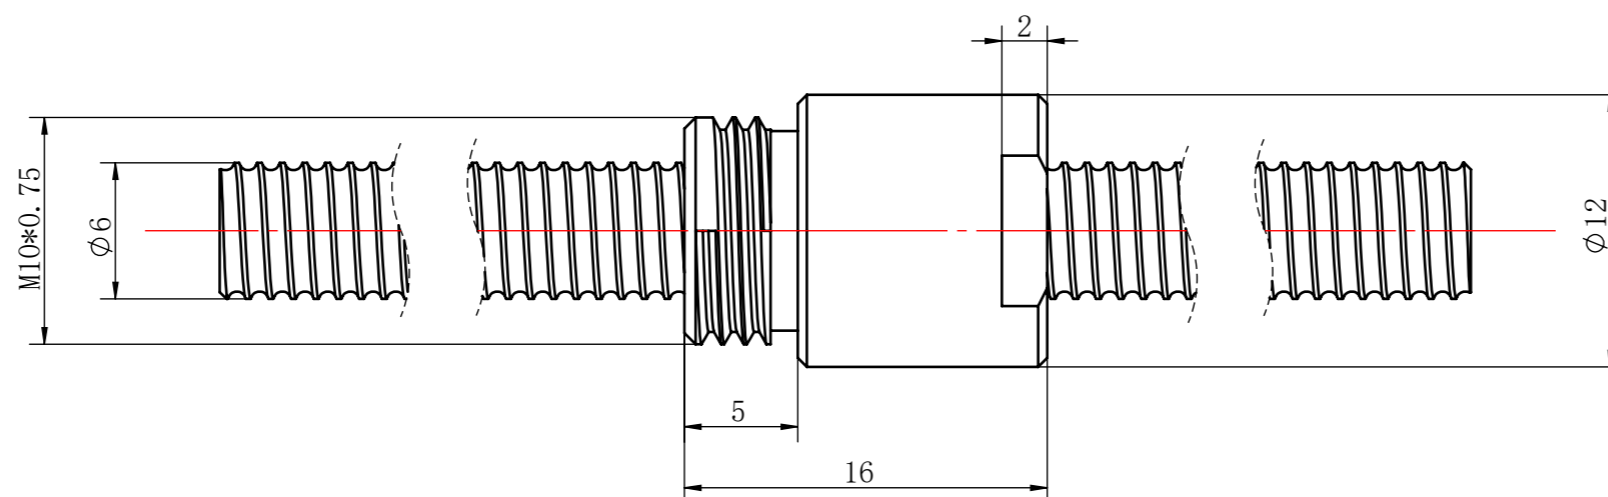

LINEAR		SPECIFICATION				CUSTOMER		
0.5~3	±0.1	B. C. D	Ø6.15	BALL SIZE	Ø0.8	C. MODLE		
>3~6	±0.1	SPACER BALL		LEAD	1	MODLE MBG0601		
>6~30	±0.2	ALLOW ROTATION NUMBER		LEAD ANGLE		NAME BALL SCREW		
>30~120	±0.3	LUBRICANT		NUMBER OF TURNSxROWS		WEIGHT		
>120~400	±0.5	O. C.	MAX. AXIAL Ca	THREAD DIRECTION/NUMBER OF THREAD		DESIGN		
>400~1000	±0.8		MAX. RPM	DYNAMIC Ca (N)		CHECK		
>1000~2000	±1.2	L. A.		STATIC Coa (N)		REV.		
ANGULAR				ep	PRELORD TORQUE		TOTAL:	
~10	±1°			V <sub>u</sub>	AXIAL PLAY		PAGE:	
>10~50	±30'			V <sub>300</sub>	SCREW MATERIAL		RATIFY	
>50~120	±20'	V <sub>2π</sub>	NUT MATERIAL		JIANGSU DINGS' INTELLIGENT CONTROL			
>120~400	±10'	ACCURACY GRADE:						

1

2

3

4

5

6

7

8